


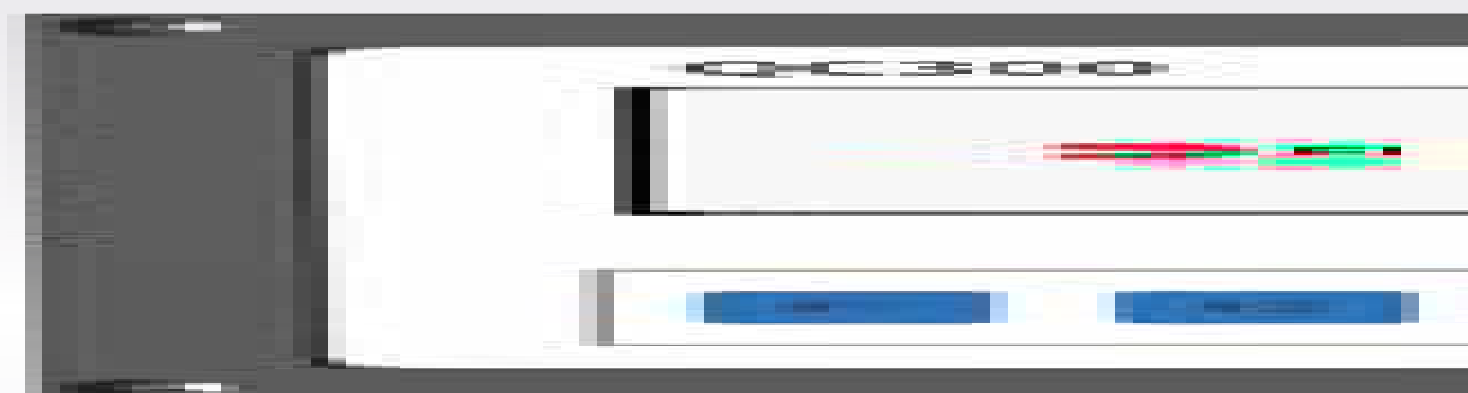


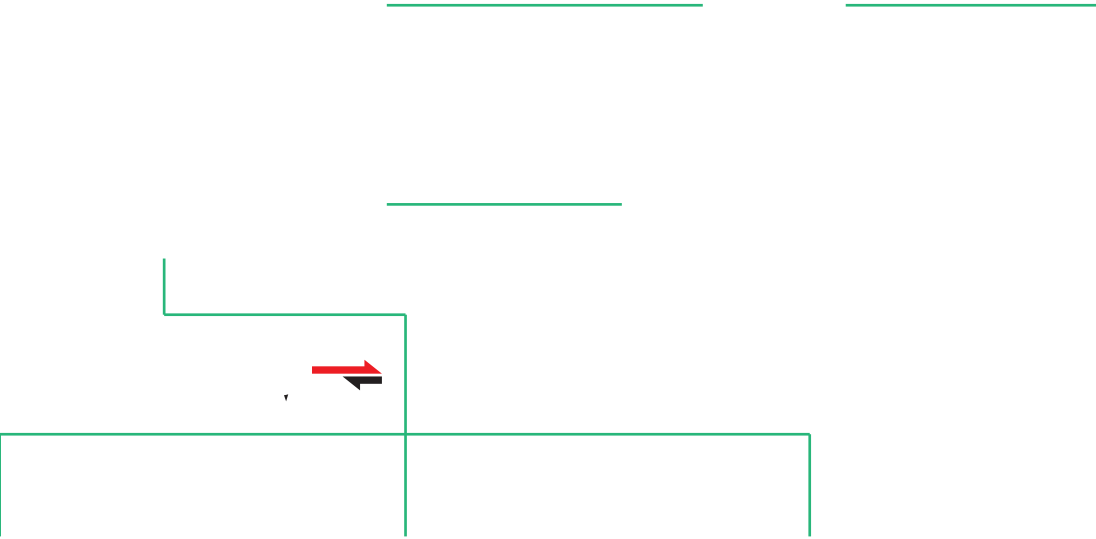



/



CAM/

1ms

1um

30

/

IO

3

9

24IN/24OUT

G-CODE

PWM

G00~G99

2 CO2/ 5V/24V

-

-

EtherCAT/

APP

/


/

EtherCAT

/

/

EDH-1000

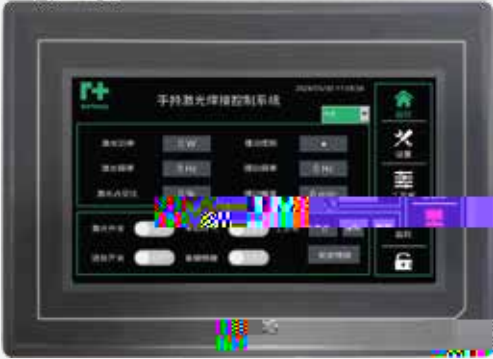



EHW1000

- 7" HMI
-
-
-
-
-

DC24V	±15V
0~150Hz	HMI
	RS232/485

/

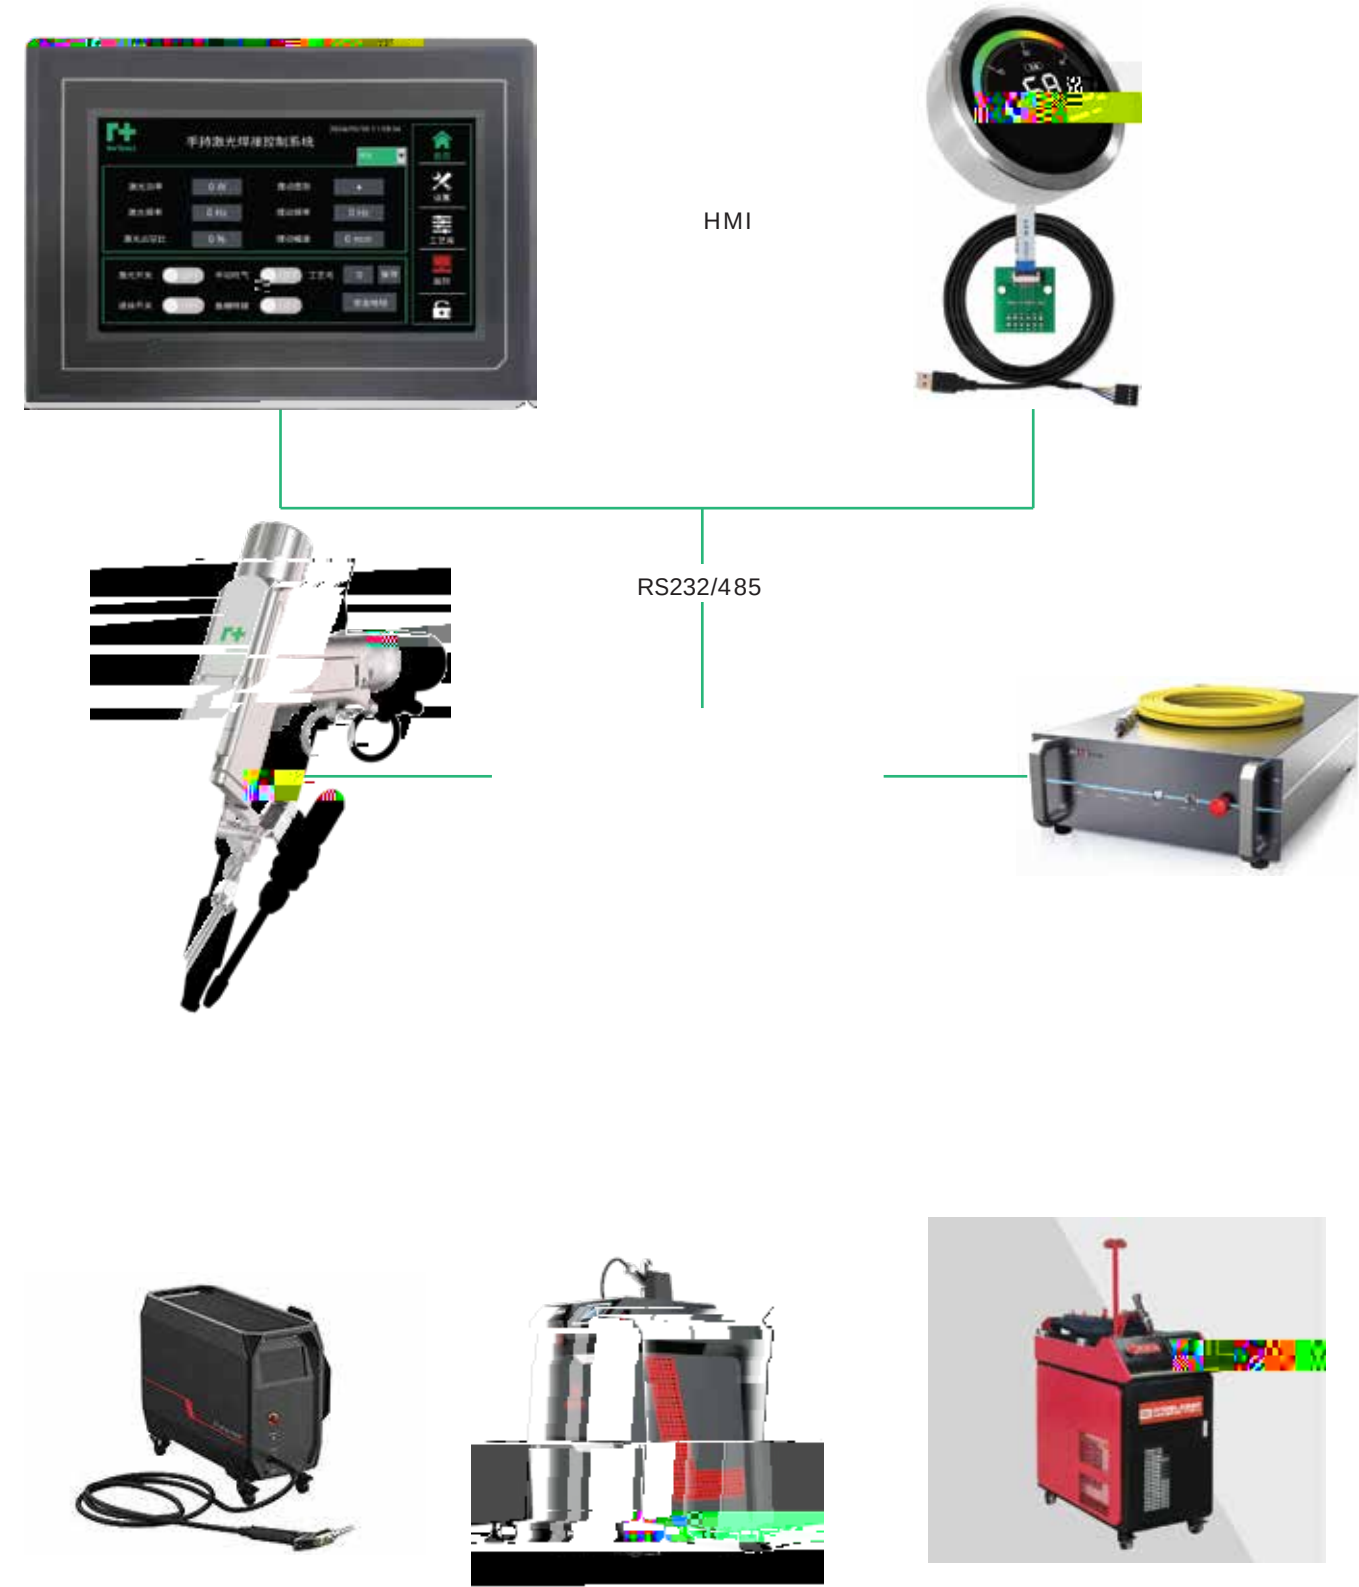

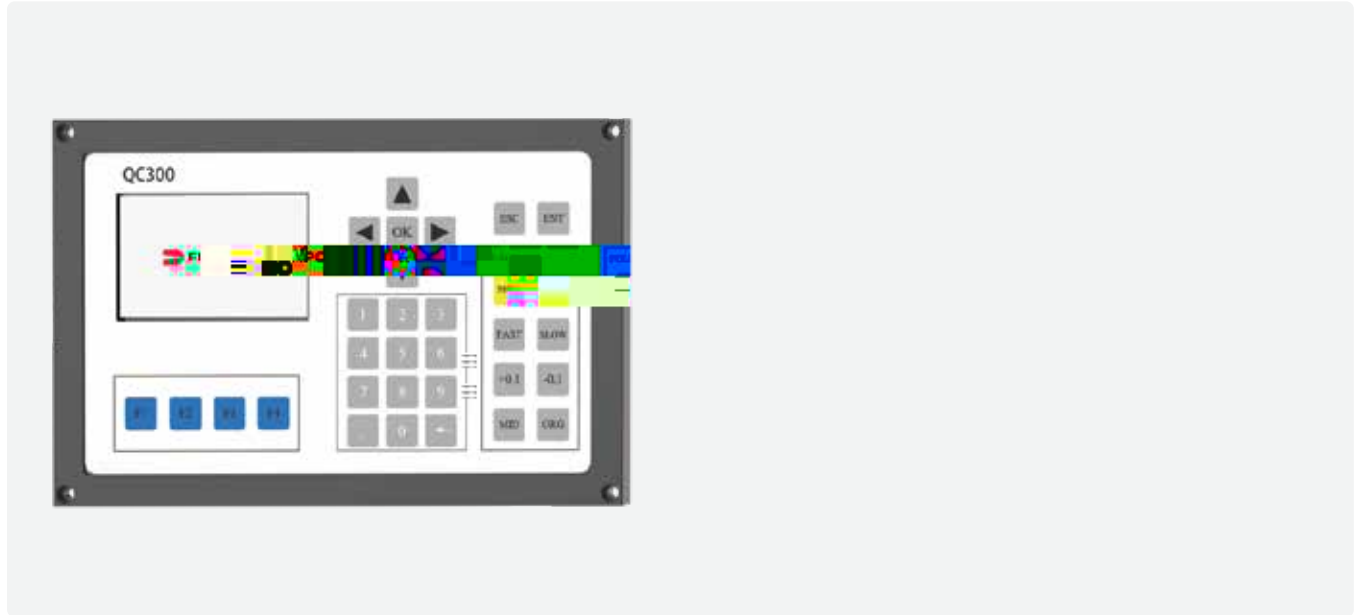

EtherCAT TCP/IP/RS485(MODBUS), CAN

0.2m m~20m m

0.001m m

999m m/s

DA

16bit

-10~+10V


4000Hz

0.05m m

2G

60 / @ 6000 1m m 0.6m m

3D

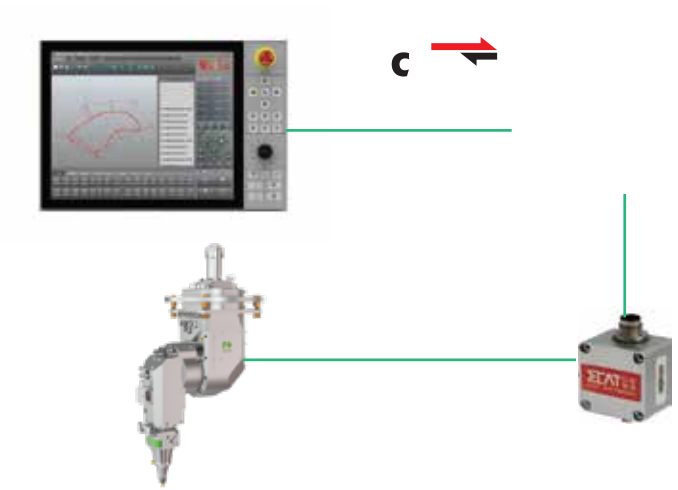

2D

EDS3020

IO

IO

2D/3D/

+ 1MHz

50kHz

28

1 2A

DA

0~+10V 16bit

EtherCAT , 100Mbps

0.2m m-20m m

PWM

1 5V 1 24V 20kHz

23 500mA

75 / @ 6000 1m m 0.6m m



IO



EtherCAT

-
-
-

2D/3D/



0.2mm-20mm

75 / @ 6000 1mm 0.6mm




EtherCAT , 100Mbps

PWM

1 5V/24V可选 20kHz

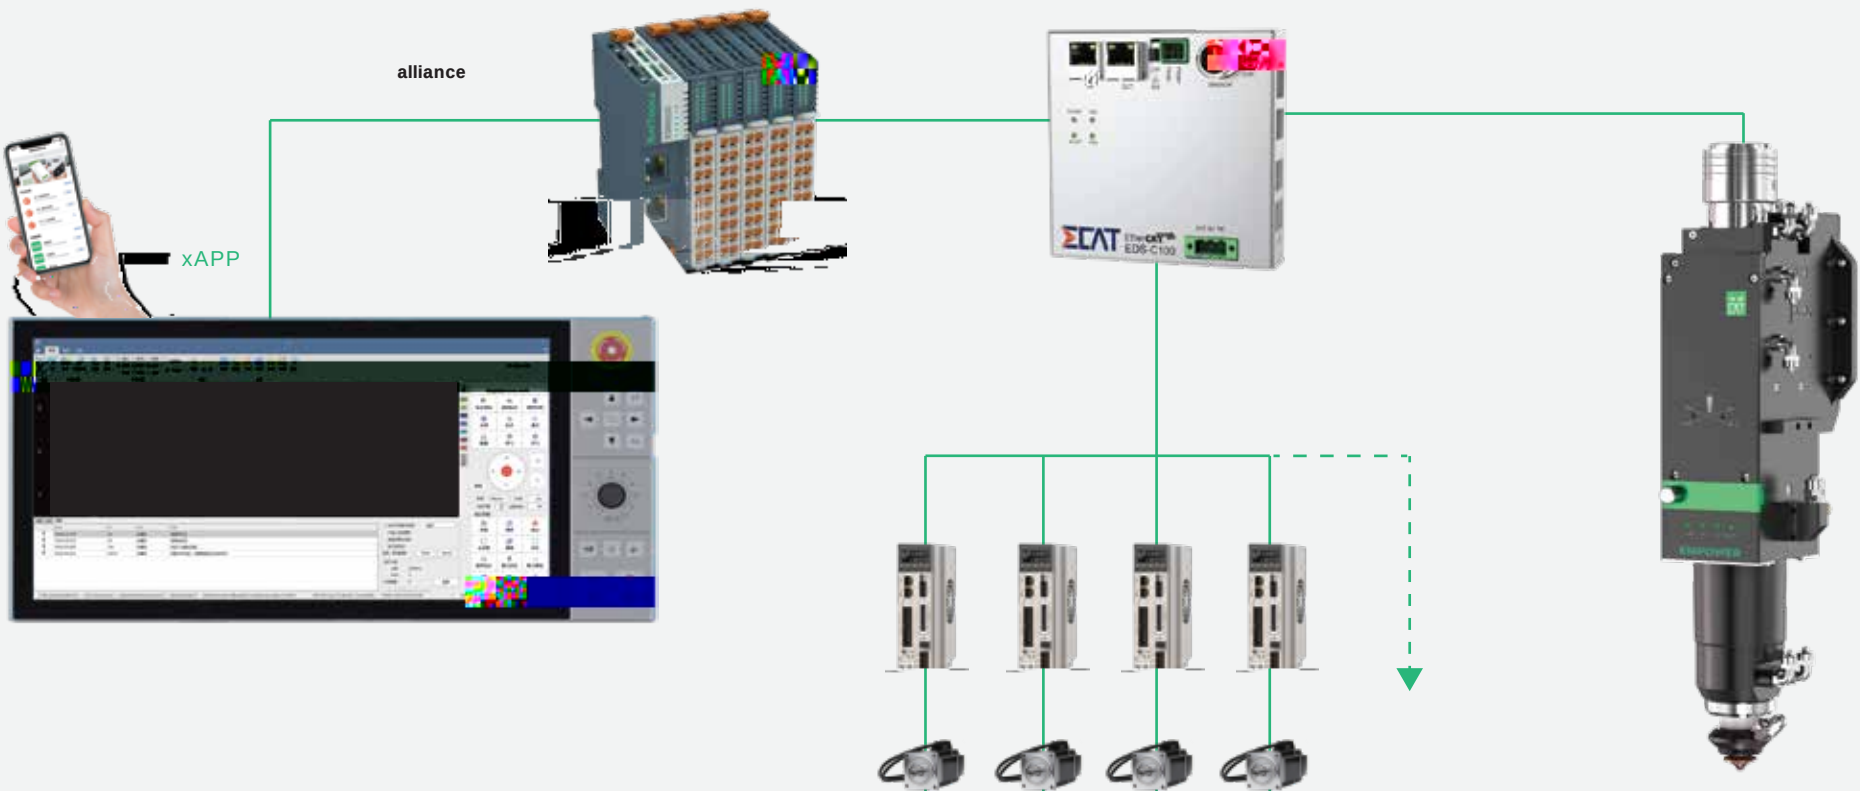

BS20K

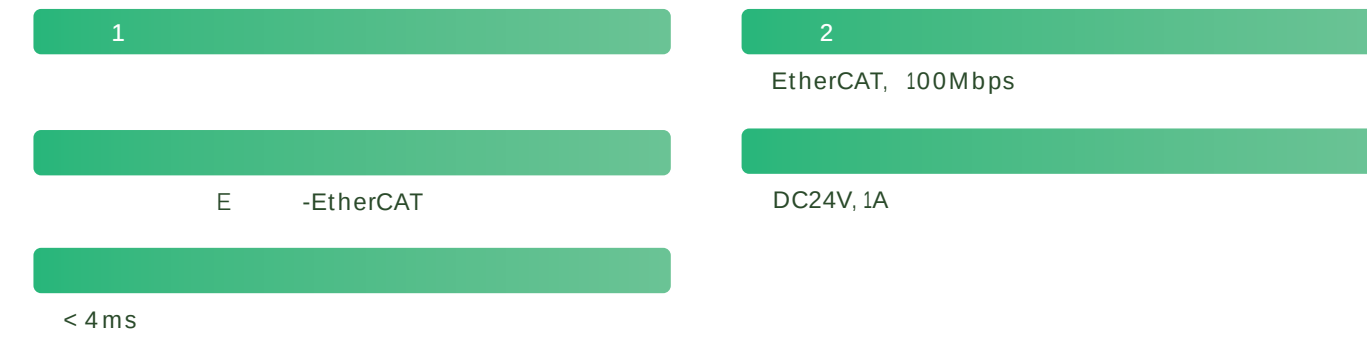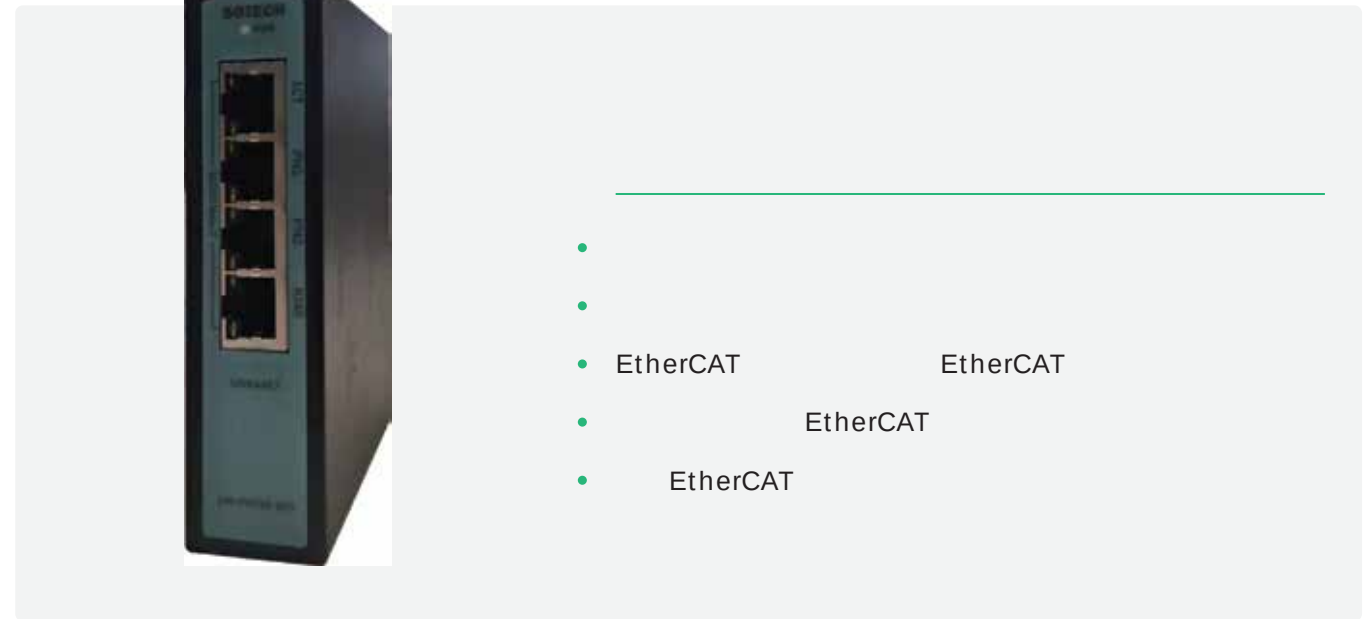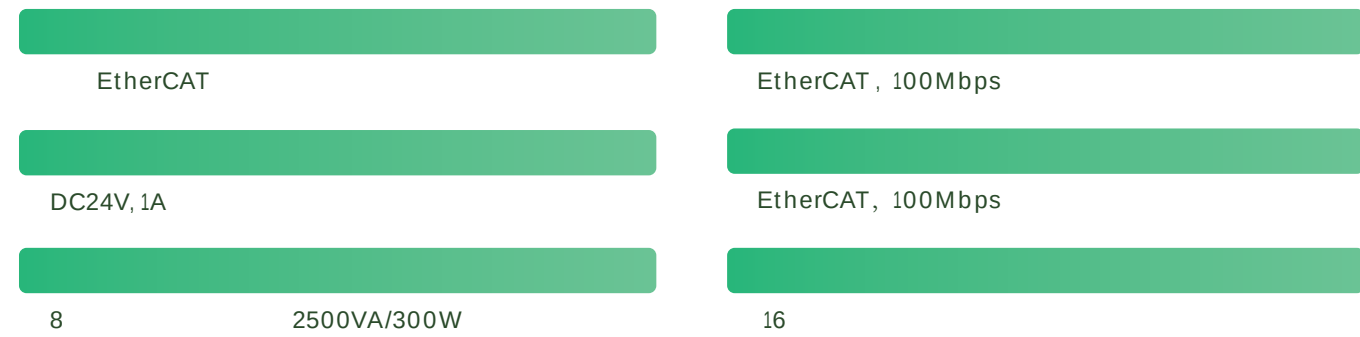

IO



EtherCAT

IO

-
-
-
-
-

EtherCAT , 100Mbps

ADC

4/8 -10~+10V/4~20mA 16bit

8 4~20ma



EBUS


NPN PNP

DAC

4/8 -10~+10V/4~20mA 16bit

20M ABZ/TTL

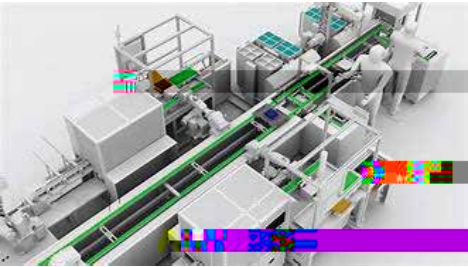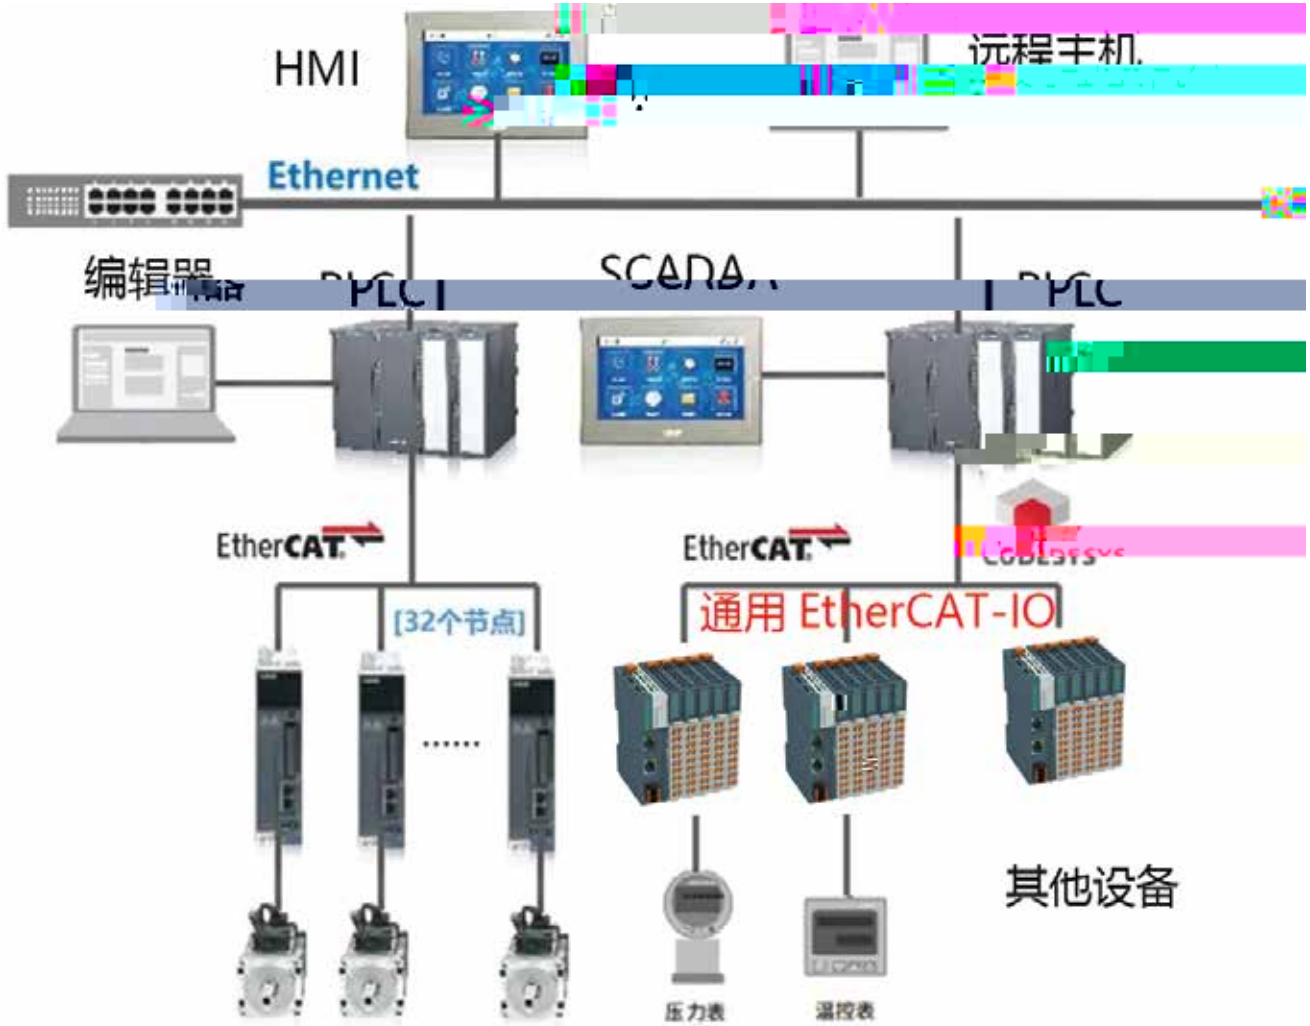

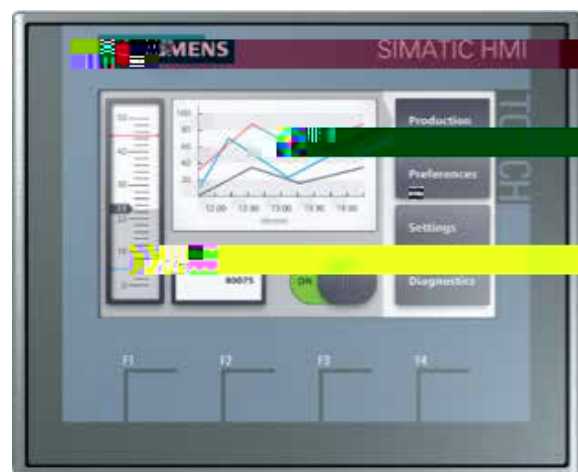



控制器

IO

