


1.1

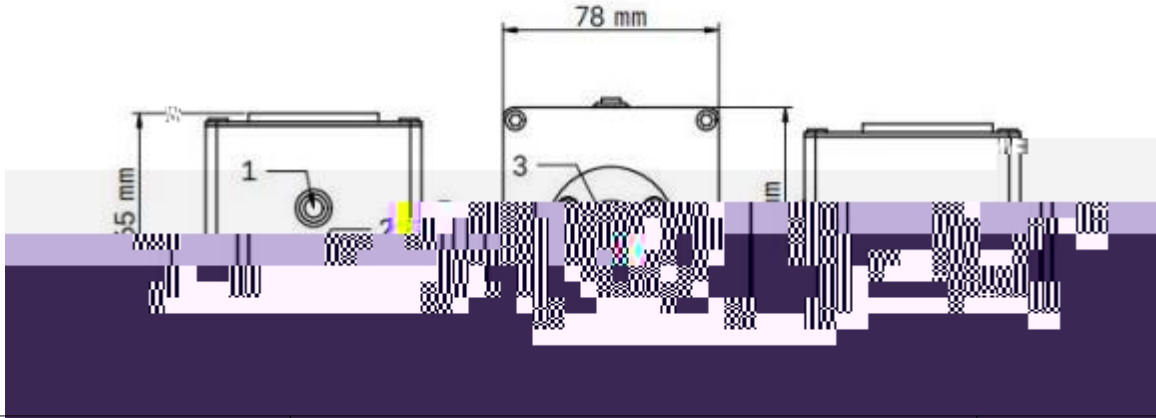

1.	2.	3.
4. WFI	5. DC5. 5- 12V	

1.2

VBA 3-5 AI

78mmx 78mmx 65mm

0.3kg

<0.08mm

/12V

W-Fi

25mmx 1mm

/

APP

/


5V 12V DC5. 5mm

USB

1.3

-
-
-
-


AI

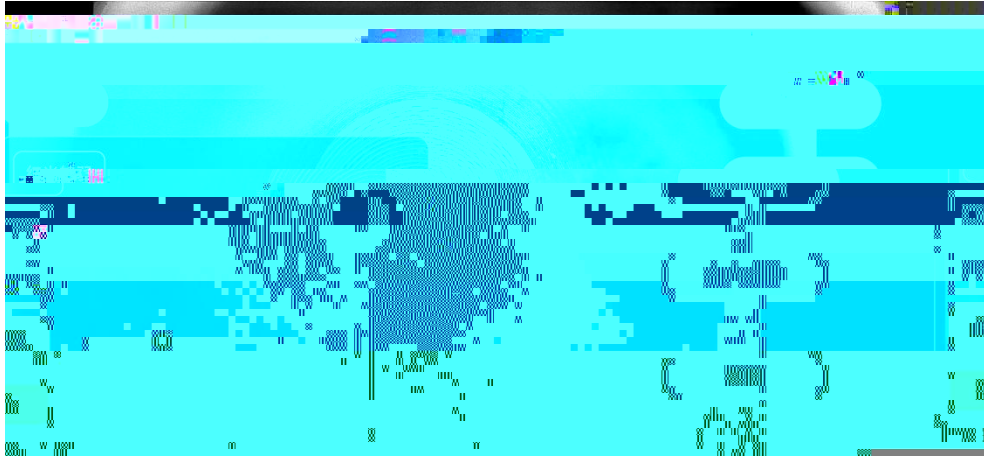


-
-

AI

AI

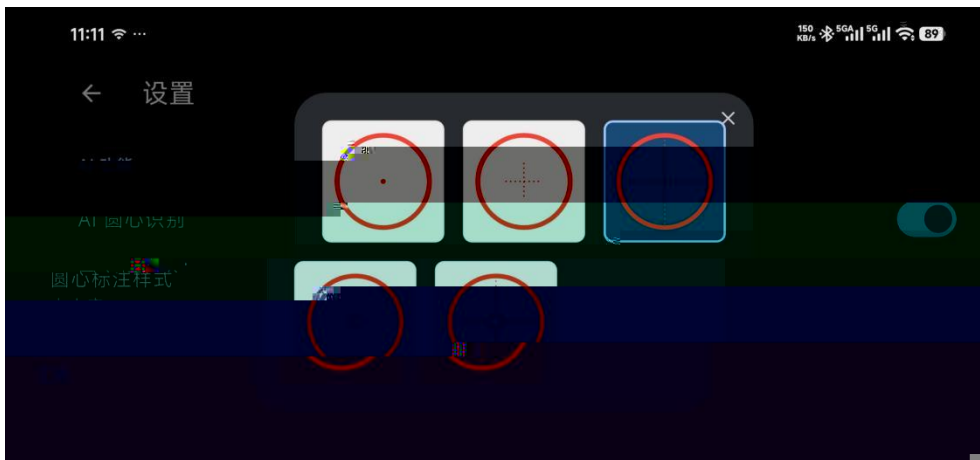


-

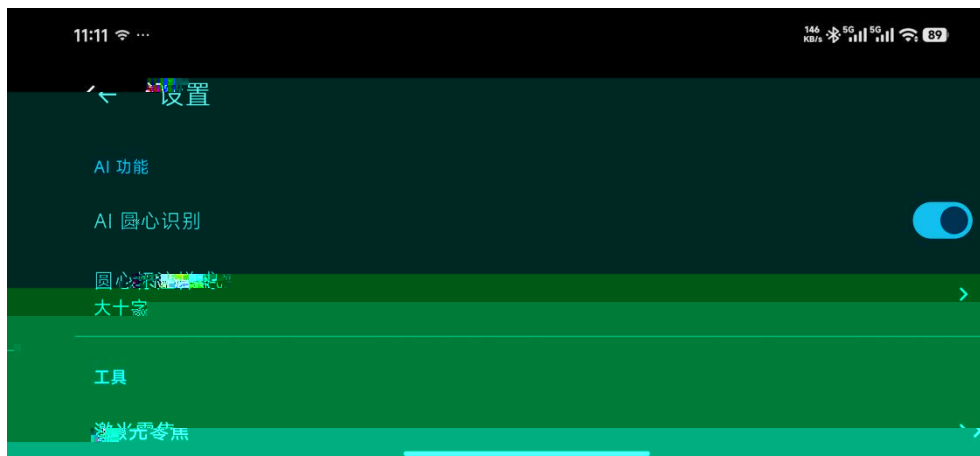



AI

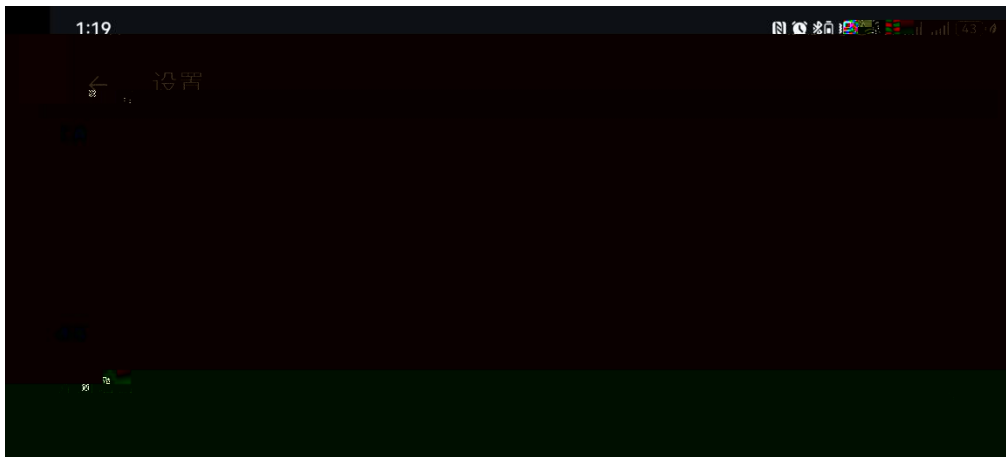

1.4

1.

2.



3. M B9 / A - K / W / S / M €


-5

150 -8 200 -16 300



4.

WFI 35 APP,

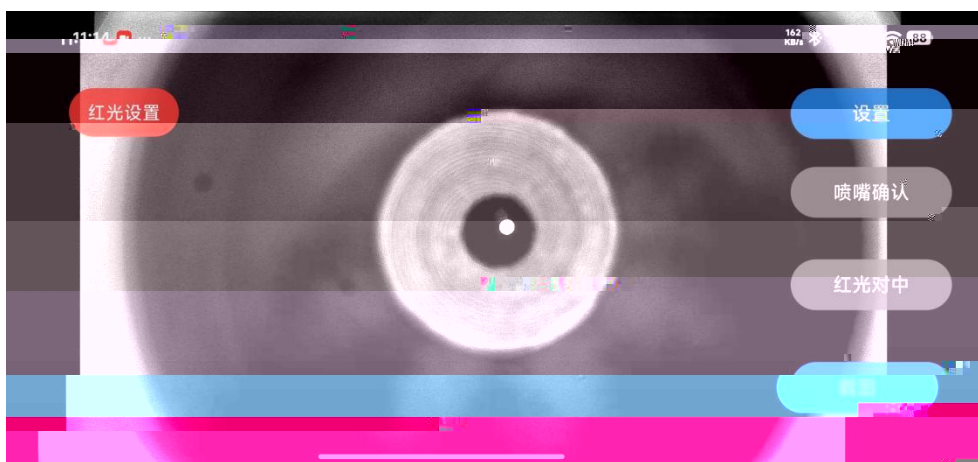

6. Z 2mm/s :




4000E




8000

7. Y Y

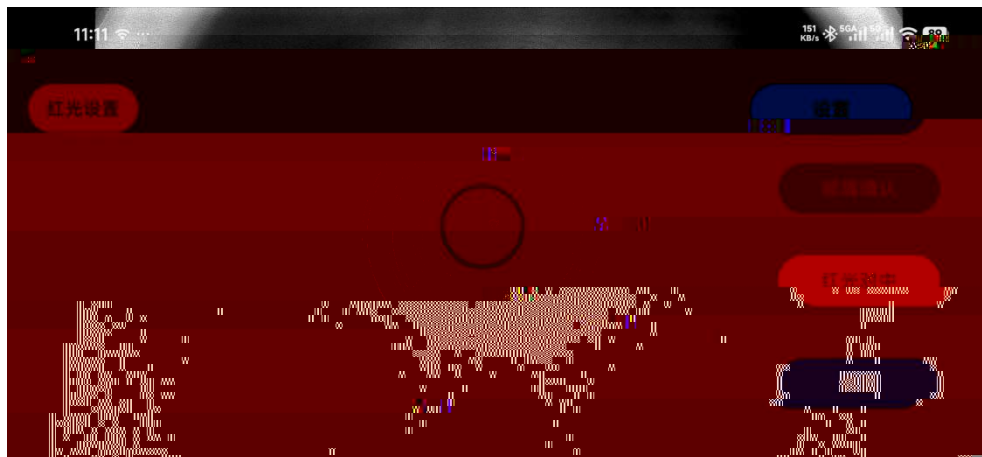

	机械坐标	工件坐标	跟随误差	
● X	784.95	785.06	0.00	毫米
● Y	213.66	213.66	0.00	毫米
● Y1	213.66	213.66	0.00	毫米
● Z	-60.01	39.99	0.00	毫米

8.

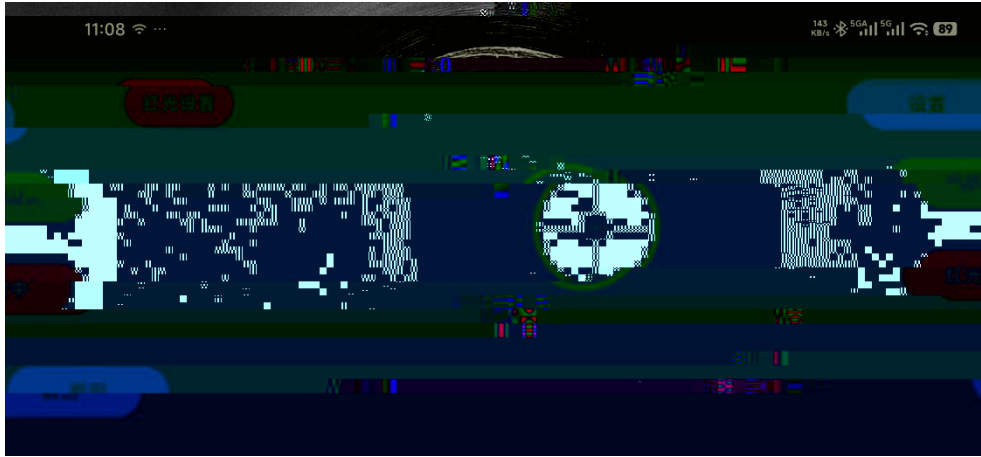

9.


Z

	机械坐标	中心坐标	跟随误差	
X	709.50	709.64	0.00	毫米
Y	256.74	256.74	0.00	毫米
Y1	256.74	256.74	0.00	毫米
Z	-130.21	1.00	0.02	毫米

10.

70mm

Z

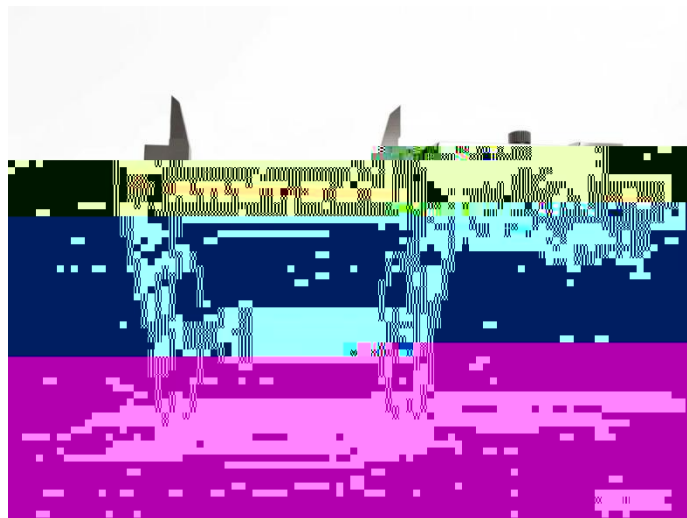

11.

1 2 3 4 8



1.5

- VBA

-
-

1.6

	YMQTZ05.0021	